


NSC2000-SLT

2 Ton Air Cooled Super Low Temp Chiller

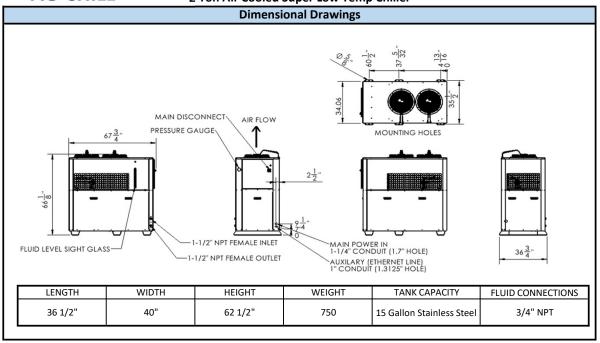

Chiller Performance Cooling Capacity Pump Performance 30000 140 120 25000 100 20000 Capacity (BTU/hr) Head (PSI) 15000 60 10000 40 5000 20 0 -65 -35 Chiller Fluid Outlet Temperature (F) 8 10 12 16 Fluid Flow (GPM)

AG-Optimists, LLC 3130 South 1030 West, Suite 1 Salt Lake City, UT 84119 (541) 610-6858 www.ag-chill.com All Information Is For Reference Only









NSC2000-SLT

Standard Features and Benefits						
Performance	Working Temperature Range	-58°F(-50°C) to 10°F(-12°C)				
	Temperature Stability	±2				
		-58°F (-50°C) - 3,900 BTU/hr (1,140 Watts)				
	Cooling Capacity at 70F	-29°F (-33.9°C) - 11,700 BTU/hr (3,430 Watts)				
		0°F (-17.8°C) - 26,600 BTU/hr (7,800 Watts)				
	Ambient Temperature (Standard)	20°F - 100°F				
	Pump Performance	0 GPM @ 117 PSI				
		7 GPM @ 65 PSI				
		14 GPM @ 14 PSI				
User Interface	Controls	Electronic Programmed Temperature Controller with Constant (Setpoint & Process)				
		Temperature Readout				
	Additional Features	Fluid Level Indicator				
Refrigeration Circuit	Compressor	Bitzer 2 Stage Reciprocating				
	Heat Exchanger	Brazed Plate Heat Exchanger				
	Refrigerant	R404a				
		Access Doute Coming Values Filter Drien Sight Class Limited Description Continued				
	Additional Features	Access Ports, Service Valves, Filter Drier, Sight Glass, Liquid Receiver, Suction Accumulator,				
		Thermostatic Expansion Valve (TXV)				
	Max Heat Rejection	58,100 BTU/hr (17.0 kW)				
_	Pump	Continuous Duty, 2.2kW Vortex Pump				
	Inlet/Outlet					
Process Fluid	illet/Outlet	3/4" NPT				
Circuit	Reservoir	15 Gallon Stainless Steel				
	Additional Features					
	Additional Federics	Inline Strainer, Inlet and Outlet Temperature Sensors, Pump Discharge Pressure Transducer				
Construction	Frame	Galvanized Steel				
	Enclosure	Powder Coated Steel Enclosure with Easy Access Panels				
Quality	Warranty	1 Year Standard Warranty				
	UL/CSA Certified (Full Assembly)					
		ETL 3170655, UL STD 61010-2-011, CAN/CSA STD, C22.2 No. 61010-2-011				
	Manufacturing Available Voltages	Manufactured in the U.C.A.				
Power		Manufactured in the U.S.A.				
		Certified ISO 9001:2015 Company				
		Max Amps (FLA)	Recommended Breaker/Service			
	490\/AC / 3D / 60H- (STANDARD)	` '	(MCA)			
	400VAC / 3P / BUTZ (STANDAKD)	24 Amps (stu)	SU Amps (stu)			
	480VAC / 3P / 60Hz (STANDARD)	24 Amps (std)	30 Amps (std)			

Optional Upgrades					
UPGRADES	Crating	External Temperature Monitoring Alternate Pumps	Controller Auto Start Remote Start		
	More Options and Customization Available - Contact Factory for More Information				

AG-Optimists, LLC

All Information Is For Reference Only







3130 South 1030 West, Suite 1 Salt Lake City, UT 84119 (541) 610-6858 www.ag-chill.com