




AG2000



2 Ton Air Cooled Freeze Chiller

Dimensional Drawings

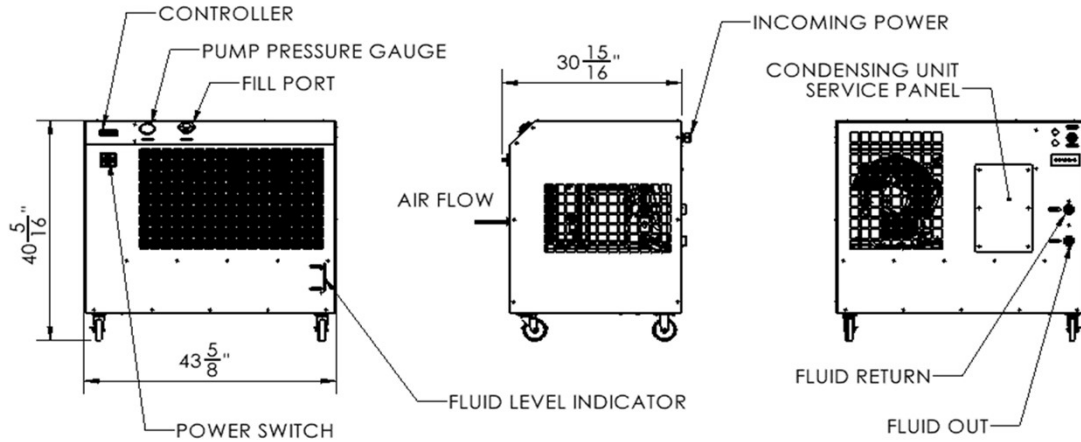

DEPTH	WIDTH	HEIGHT	WEIGHT	TANK CAPACITY	FLUID CONNECTIONS
30 15/16"	43 5/8"	40 5/16"	550 lbs	15 Gallon Poly Tank	3/4" NPT

Chiller Performance

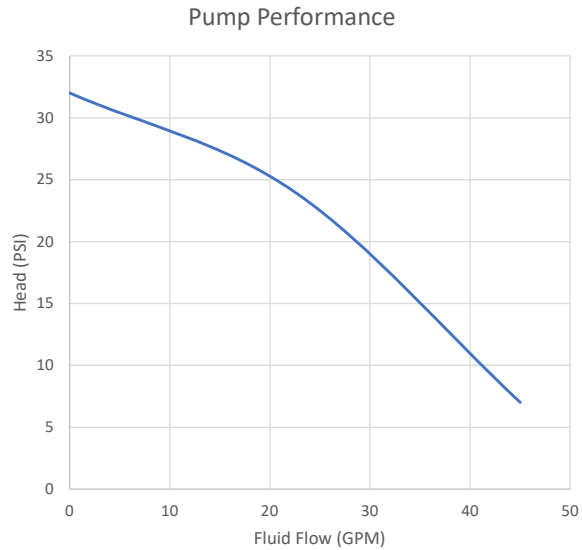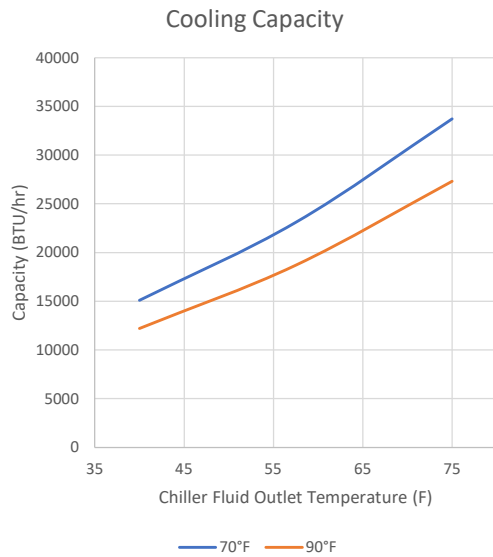

AG-Optimists, LLC
 3130 South 1030 West, Suite 1
 Salt Lake City, UT 84119
 (801) 244-9769
www.ag-optimists.com

All Information Is For Reference Only





AG2000

Standard Features and Benefits			
Performance	Working Temperature Range	40°F(4.5°C) to 75°F(24°C)	
	Temperature Stability	±2	
	Cooling Capacity at 70F	40°F (4.4°C) - 15,100 BTU/hr (4,430 Watts) 57.5°F (14.2°C) - 23,100 BTU/hr (6,770 Watts) 75°F (23.9°C) - 33,700 BTU/hr (9,880 Watts)	
	Ambient Temperature (Standard)	40°F - 100°F	
	Pump Performance	0 GPM @ 32 PSI 22.5 GPM @ 24 PSI 45 GPM @ 7 PSI	
User Interface	Controls	Electronic Programmed Temperature Controller with Constant (Setpoint & Process) Temperature Readout	
	Additional Features	Fluid Level Indicator, Pump Pressure Gauge	
Refrigeration Circuit	Compressor	Copeland Scroll	
	Heat Exchanger	Braze Plate Heat Exchanger	
	Refrigerant	R134a	
	Additional Features	Access Ports, Service Valves, Filter Drier, Sight Glass, Liquid Receiver, High and Low Pressure Controls, Thermostatic Expansion Valve (TXV)	
	Max Heat Rejection	32,000 BTU/hr (9.4 kW)	
Process Fluid Circuit	Pump	Continuous Duty, 3/4 HP Centrifugal Pump	
	Inlet/Outlet	3/4" NPT	
	Reservoir	15 Gallon Poly Tank	
	Additional Features	Inline Strainer, Process Fluid Temperature Sensor, Pump Discharge Pressure Gauge, Internal Fluid Bypass Valve	
Construction	Frame	Galvanized Steel	
	Enclosure	Powder Coated Steel Enclosure with Easy Access Panels	
Quality	Warranty	1 Year Standard Warranty	
	UL/CSA Certified (Full Assembly)	ETL 3170655, UL STD 1994, CAN/CSA STD, C22.2 No. 236	
	Manufacturing	Manufactured in the U.S.A. Certified ISO 9001:2015 Company	
Power	Available Voltages	Max Amps (FLA)	Recommended Breaker/Service (MCA)
	208-240VAC / 1P / 60Hz (STANDARD)	28.7 Amps (std)	36.7 Amps (std)
	208-240VAC / 3P / 60Hz	20 Amps	25 Amps
	480VAC / 3P / 60Hz	9.3 Amps	12 Amps

Optional Upgrades			
UPGRADES	Anti-Backflow Process Heating Pass-through	External Temperature Monitoring Alternate Pumps	Controllers
More Options and Customization Available - Contact Factory for More Information			

AG-Optimists, LLC
 3130 South 1030 West, Suite 1
 Salt Lake City, UT 84119
 (801) 244-9769
www.ag-optimists.com

All Information Is For Reference Only

