



AG20000-ULT

20 Ton Air Cooled Ultra Low Temp Chiller (Qty 4 AG5000-ULT)

Dimensional Drawings

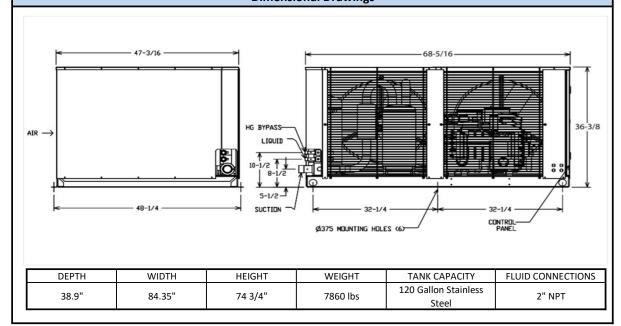

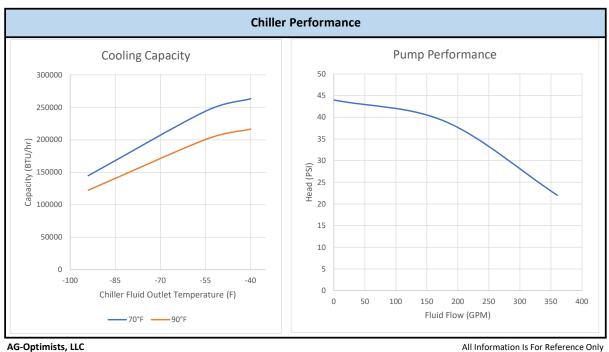

AG-Optimists, LLC 3130 South 1030 West, Suite 1 Salt Lake City, UT 84119 (801) 244-9769 www.ag-optimists.com





AG20000-ULT

	S	tandard Features and Benefits	
Performance	Working Temperature Range	-112°F(-80°C) to 70°F(21°C)	
	Temperature Stability	±2	
	Cooling Capacity at 70F	-94°F (-70°C) - 144,800 BTU/hr (42,440 Watts)	
		-55°F (-48.3°C) - 243,900 BTU/hr (71,480 Watts)	
		-40°F (-40°C) - 263,300 BTU/hr (77,170 Watts)	
	Ambient Temperature (Standard)	40°F - 100°F	
	Pump Performance	0 GPM @ 44 PSI	
		180 GPM @ 39 PSI	
		360 GPM @ 22 PSI	
	Controls	Electronic Programmed Temperature Controller (PLC) with Constant (Setpoint & Process)	
User Interface		Temperature Readout	
	Additional Features	Fluid Level Indicator, Touch Screen Controls	
Refrigeration Circuit	Compressor	Copeland Discus	
	Heat Exchanger	Brazed Plate Heat Exchanger	
	Refrigerant	R508B	
		Access Ports, Service Valves, Filter Drier, Sight Glass, Liquid Receiver, Thermostatic Expansior	
	Additional Features	Valve (TXV), Oil Separator	
	Max Heat Rejection	160,000 BTU/hr (46.8 kW)	
Process Fluid Circuit	Pump	Continuous Duty, 20 HP Centrifugal Pump	
	Inlet/Outlet	2" NPT	
	Reservoir	120 Gallon Stainless Steel	
	Additional Features	Inline Strainer, Inlet and Outlet Temperature Sensors, Pump Discharge Pressure Transducer	
Construction	Frame	Galvanized Steel	
	Enclosure	Powder Coated Steel Enclosure with Easy Access Panels	
Quality	Warranty	1 Year Standard Warranty	
	UL/CSA Certified (Full Assembly)	Certified for Outdoor Use ETL 3170655, UL STD 61010-2-011, CAN/CSA STD, C22.2 No. 61010-2-011	
	Manufacturing	Manufactured in the U.S.A. Certified ISO 9001:2015 Company	
Power	Available Voltages	Max Amps (FLA)	Recommended Breaker/Service (MCA)
	480VAC / 3P / 60Hz (STANDARD)	106.8 Amps (std)	125.6 Amps (std)

Optional Upgrades				
More Options and Customization Available - Contact Factory for More Information				
erence Only				
N THE USA				