




AG5000-ULT



5 Ton Air Cooled Ultra Low Temp Chiller

Dimensional Drawings

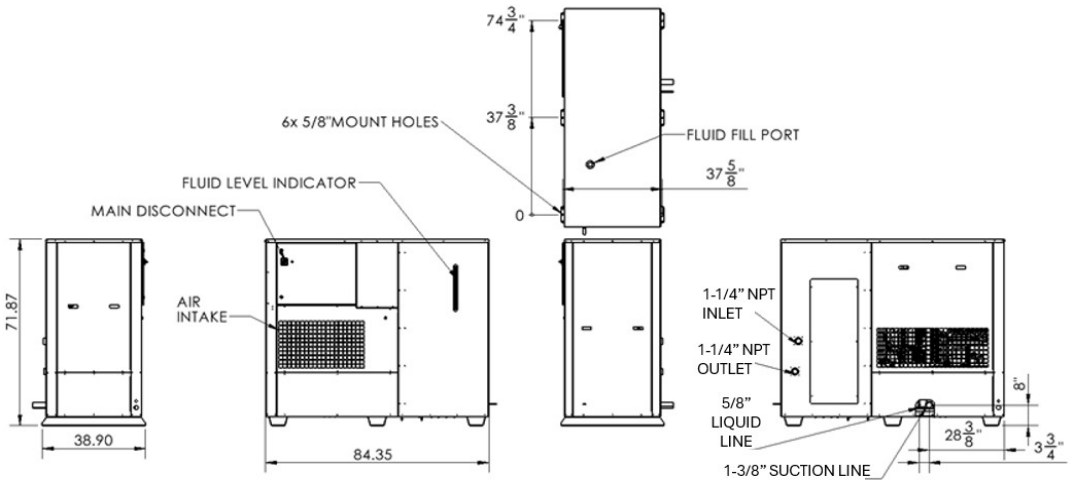

DEPTH	WIDTH	HEIGHT	WEIGHT	TANK CAPACITY	FLUID CONNECTIONS
38.9"	84.35"	74 3/4"	1965 lbs	24 Gallon Stainless Steel	1-1/2" NPT

Chiller Performance

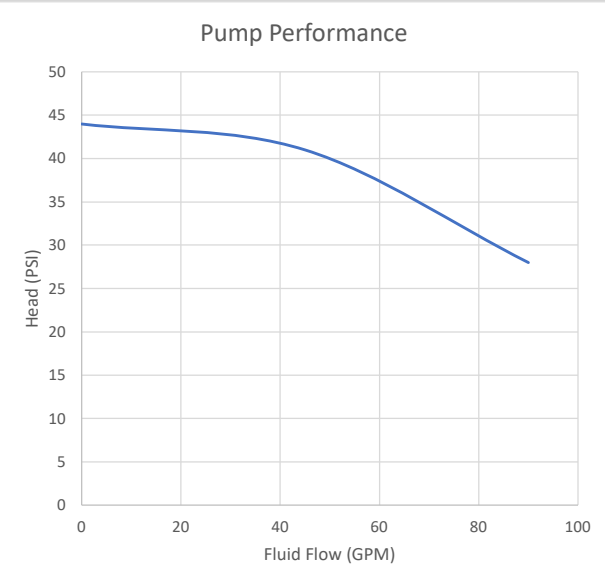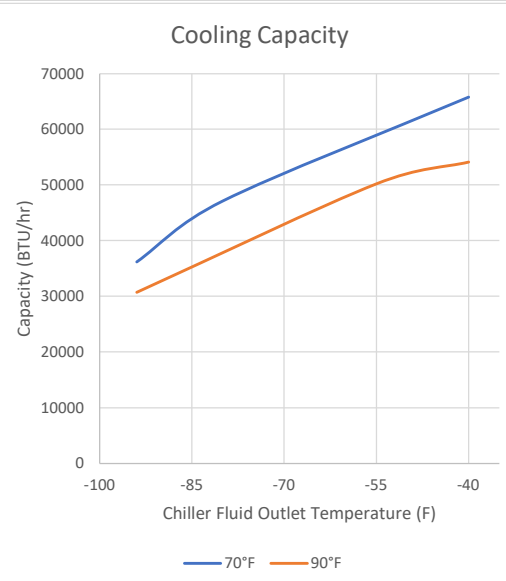

AG-Optimists, LLC
 3130 South 1030 West, Suite 1
 Salt Lake City, UT 84119
 (801) 244-9769
www.ag-optimists.com

All Information Is For Reference Only





AG5000-ULT

Standard Features and Benefits		
Performance	Working Temperature Range	-112°F(-80°C) to 70°F(21°C)
	Temperature Stability	±2
	Cooling Capacity at 70F	-94°F (-70°C) - 36,200 BTU/hr (10,610 Watts) -80°F (-62.2°C) - 47,100 BTU/hr (13,800 Watts) -40°F (-40°C) - 65,800 BTU/hr (19,280 Watts)
	Ambient Temperature (Standard)	40°F - 100°F
	Pump Performance	0 GPM @ 44 PSI 45 GPM @ 41 PSI 90 GPM @ 28 PSI
User Interface	Controls	Electronic Programmed Temperature Controller (PLC) with Constant (Setpoint & Process) Temperature Readout
	Additional Features	Fluid Level Indicator, Touch Screen Controls, IO Remote Chiller Control System
Refrigeration Circuit	Compressor	Copeland Discus
	Heat Exchanger	Braze Plate Heat Exchanger
	Refrigerant	R508B
	Additional Features	Access Ports, Service Valves, Filter Drier, Sight Glass, Liquid Receiver, Thermostatic Expansion Valve (TXV), Oil Separator
	Max Heat Rejection	40,000 BTU/hr (11.7 kW)
Process Fluid Circuit	Pump	Continuous Duty, 5 HP Centrifugal Pump
	Inlet/Outlet	1-1/2" NPT
	Reservoir	24 Gallon Stainless Steel
	Additional Features	Inline Strainer, Inlet and Outlet Temperature Sensors, Pump Discharge Pressure Transducer
Construction	Frame	Galvanized Steel
	Enclosure	Powder Coated Steel Enclosure with Easy Access Panels
Quality	Warranty	1 Year Standard Warranty
	UL/CSA Certified (Full Assembly)	Certified for Outdoor Use ETL 3170655, UL STD 61010-2-011, CAN/CSA STD, C22.2 No. 61010-2-011
	Manufacturing	Manufactured in the U.S.A. Certified ISO 9001:2015 Company
Power	Available Voltages	Max Amps (FLA) Recommended Breaker/Service (MCA)
	480VAC / 3P / 60Hz (STANDARD)	26.7 Amps (std) 31.4 Amps (std)

Optional Upgrades	
UPGRADES	Process Heating UL/CSA Outdoor Certified Extended Ambient (-15°F)
	External Temperature Monitoring Alternate Pumps
	Crating
More Options and Customization Available - Contact Factory for More Information	

AG-Optimists, LLC
 3130 South 1030 West, Suite 1
 Salt Lake City, UT 84119
 (801) 244-9769
www.ag-optimists.com

All Information Is For Reference Only

